

AT831R MINIATURE CARDIOID CONDENSER MICROPHONE



- Clip-on lavalier mic provides crisp, full-sounding voice pickup
- Also excels as an instrument mic, especially for pickup of acoustic guitar with included AT8444 instrument adapter
- Excellent gain before feedback and suppression of background noise
- UniSteep® filter provides a steep low-frequency attenuation to improve sound pickup without affecting voice quality
- Operates on phantom power only

For use as a lavalier, attach the microphone about six inches below the chin. Anticipate movements that may cause the microphone to rub against or be covered by clothing, and position the microphone to avoid it.

The AT831R is intended for use in professional applications where remote power is available. It requires 11 to 52V DC phantom power, which may be provided by a mixer or console, or by a separate, in-line source such as the Audio-Technica AT8801 single-channel or CP8506 four-channel phantom power supplies.

Output from the power module's XLRM-type connector is low impedance (Lo-Z) balanced. The signal appears across Pins 2 and 3; Pin 1 is ground (shield). Output phase is "Pin 2 hot" – positive acoustic pressure produces positive voltage at Pin 2.

To avoid phase cancellation and poor sound, all mic cables must be wired consistently: Pin 1-to-Pin 1, etc.

An integral 80 Hz high-pass UniSteep® filter provides easy switching from a flat frequency response to a low-end roll-off. The roll-off position reduces the microphone's sensitivity to popping in close vocal use. It also reduces the pickup of low-frequency ambient noise (such as traffic, air-handling systems, etc.), room reverberation and mechanically coupled vibrations.

The microphone is RoHS compliant—free from all substances specified in the EU directive on hazardous substances.

Avoid leaving the microphone in the open sun or in areas where temperatures exceed 110° F (43° C) for extended periods. Extremely high humidity should also be avoided.


AT831R SPECIFICATIONS†

ELEMENT	Fixed-charge back plate permanently polarized condenser
POLAR PATTERN	Cardioid
FREQUENCY RESPONSE	40-16,000 Hz
LOW FREQUENCY ROLL-OFF	80 Hz, 18 dB/octave
OPEN CIRCUIT SENSITIVITY	-42 dB (7.9 mV) re 1V at 1 Pa*
IMPEDANCE	250 ohms
MAXIMUM INPUT SOUND LEVEL	141 dB SPL, 1 kHz at 1% T.H.D.
DYNAMIC RANGE (typical)	112 dB, 1 kHz at Max SPL
SIGNAL-TO-NOISE RATIO†	65 dB, 1 kHz at 1 Pa*
PHANTOM POWER REQUIREMENTS	11-52V DC, 2 mA typical
SWITCH	Flat, roll-off
WEIGHT (less cable and accessories)	
MICROPHONE	2.8 g (0.1 oz)
POWER MODULE	81 g (2.9 oz)
DIMENSIONS	
MICROPHONE	25.0 mm (0.98") long, 10.2 mm (0.40") diameter
POWER MODULE	92.9 mm (3.66") long, 18.9 mm (0.74") diameter
OUTPUT CONNECTOR (power module)	Integral 3-pin XLRM-type
CABLE	4.0 m (13.1') long (permanently attached to microphone), 3.2 mm (0.13") diameter, 2-conductor, shielded cable with TA3F-type connector
ACCESSORIES FURNISHED	AT8538 power module; AT8419 clothing clip; AT8444 instrument adapter; AT8116 windscreen; protective carrying case

†In the interest of standards development, A.T.U.S. offers full details on its test methods to other industry professionals on request.

*1 Pascal = 10 dynes/cm² = 10 microbars = 94 dB SPL

† Typical, A-weighted, using Audio Precision System One. Specifications are subject to change without notice.

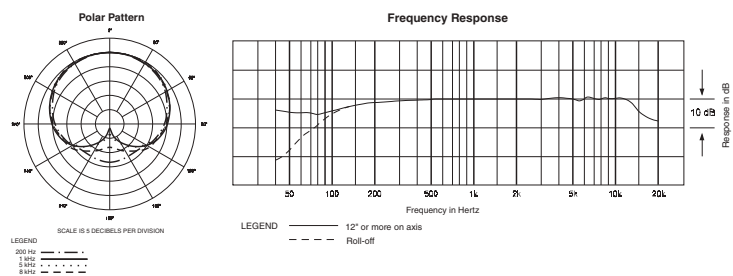

 **audio-technica**

Audio-Technica U.S., Inc., 1221 Commerce Drive, Stow, Ohio 44224
Audio-Technica Limited, Old Lane, Leeds LS11 8AG England

www.audio-technica.com

P52049 ©2008 Audio-Technica U.S., Inc. Printed in Japan

