

# AT2020 CARDIOID CONDENSER MICROPHONE



## AT2020 SPECIFICATIONS<sup>†</sup>

<b>ELEMENT</b>	Fixed-charge back plate permanently polarized condenser
<b>POLAR PATTERN</b>	Cardioid
<b>FREQUENCY RESPONSE</b>	20-20,000 Hz
<b>OPEN CIRCUIT SENSITIVITY</b>	-37 dB (14.1 mV) re 1V at 1 Pa*
<b>IMPEDANCE</b>	100 ohms
<b>MAXIMUM INPUT SOUND LEVEL</b>	144 dB SPL, 1 kHz at 1% T.H.D.
<b>NOISE<sup>†</sup></b>	20 dB SPL
<b>DYNAMIC RANGE (typical)</b>	124 dB, 1 kHz at Max SPL
<b>SIGNAL-TO-NOISE RATIO<sup>†</sup></b>	74 dB, 1 kHz at 1 Pa*
<b>PHANTOM POWER REQUIREMENTS</b>	48V DC, 2 mA typical
<b>WEIGHT (less accessories)</b>	12.1 oz (345 g)
<b>DIMENSIONS</b>	6.38" (162.0 mm) long, 2.05" (52.0 mm) maximum body diameter
<b>OUTPUT CONNECTOR</b>	Integral 3-pin XLRM-type
<b>ACCESSORIES FURNISHED</b>	Stand mount for 5/8"-27 threaded stands; 5/8"-27 to 3/8"-16 threaded adapter; soft protective pouch

<sup>†</sup>In the interest of standards development, A.T.U.S. offers full details on its test methods to other industry professionals on request.

\*1 Pascal = 10 dynes/cm<sup>2</sup> = 10 microbars = 94 dB SPL

<sup>†</sup> Typical, A-weighted, using Audio Precision System One. Specifications are subject to change without notice.


- The price/performance standard in side-address studio condenser microphone technology
- Ideal for project/home-studio applications
- High SPL handling and wide dynamic range provide unmatched versatility
- Custom-engineered 16 mm low-mass diaphragm provides extended frequency response and superior transient response
- Cardioid polar pattern reduces pickup of sounds from the sides and rear, improving isolation of desired sound source
- Pivoting, threaded stand mount attaches securely for easy and precise placement of the microphone

The AT2020 is intended for use in applications where remote power is available. It requires 48V DC phantom power, which may be provided by a mixer or console, or by a separate, in-line source such as the Audio-Technica AT8801 single-channel and CP8506 four-channel phantom power supplies.

Output from the microphone's XLRM-type connector is low impedance (Lo-Z) balanced. The signal appears across Pins 2 and 3; Pin 1 is ground (shield). Output phase is "Pin 2 hot" – positive acoustic pressure produces positive voltage at Pin 2.

To avoid phase cancellation and poor sound, all mic cables must be wired consistently: Pin 1-to-Pin 1, etc.

Avoid leaving the microphone in the open sun or in areas where temperatures exceed 110° F (43° C) for extended periods. Extremely high humidity should also be avoided.

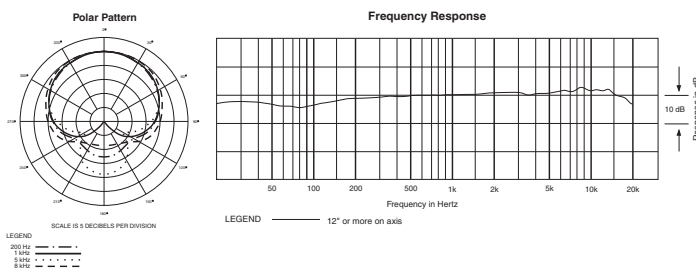

**Audio-Technica U.S., Inc.**, 1221 Commerce Drive, Stow, Ohio 44224  
**Audio-Technica Limited**, Old Lane, Leeds LS11 8AG England  
[www.audio-technica.com](http://www.audio-technica.com)

P#1423-10500 P51722-EN ©2004 Audio-Technica U.S., Inc. Printed in China