

Product Specifications

PG27USB Side Address Condenser Microphone

Overview

The PG27USB side-address condenser microphone easily plugs into a computer USB port for the convenience of digital recording. Designed with a flat frequency response, the PG27USB naturally reproduces a wide variety of acoustic, amplified and vocal sound sources - with professional clarity and guaranteed "Plug and Play" Shure quality.

Features

- USB Plug and Play connectivity allows the convenience of digital recording, anywhere your computer can go.
- Compatible with Windows Vista, XP, 2000, and Mac OS X (10.1 or later)
- Integrated pre-amp with Microphone Gain Control allows control of input signal strength
- Zero Latency Monitoring for real-time playback and multi-tracking without disorientation
- Headphone jack for monitoring with 1/8" connectivity
- Monitor Mix Control for blending microphone and playback audio

Available Models


PG27USB	Includes a 9.8 ft (3m) USB Cable, Stand Adapter and a Zippered Pouch.
----------------	---

Specifications


Frequency Response	20 to 20,000 Hz
Polar Pattern	Cardioid
Max SPL (20 Hz to 20 kHz, <1% THD)	PAD OFF: 130 dB SPL PAD ON: 145 dB SPL
Switch	Attenuator: 20 dB
Power Requirements	USB-powered, 500 mA maximum
Digital Noise Floor (20 Hz to 20 kHz, A-weighted)	Minimum MIC GAIN setting: -81 dB Maximum MIC GAIN setting: -78 dB
Sampling Rate	up to 48 kHz
Bit Depth	16 bit
Peak Signal Indicator (Tri-color)	OFF: -30 dB FS Green: -30 to -12 dB FS Yellow: -12 to 0 dB FS Red: >0 (digital converter clipped)
Sampling Rate	up to 48 kHz
Adjustable Gain Range	34 dB
Headphone Output	3.5 mm (1/8 inch)



PG27USB



Polar Pattern
Measured at 1000 Hz

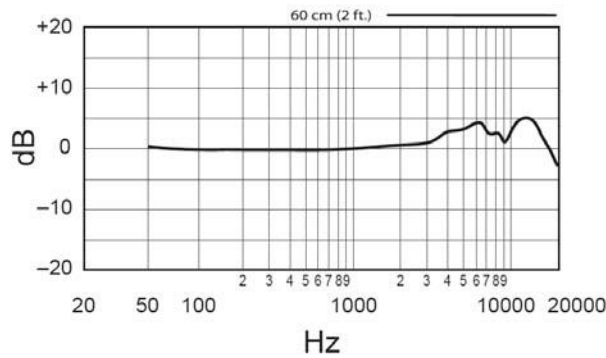

Frequency Response

