



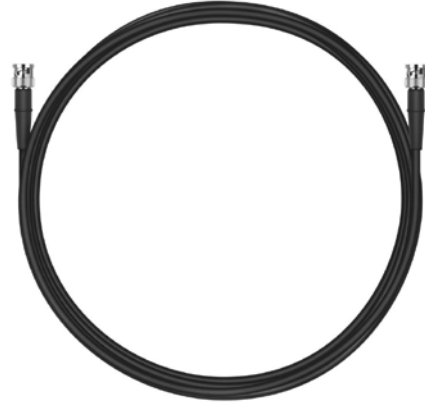

GZL RG 58 | GZL RG 8x RF Antenna Cables

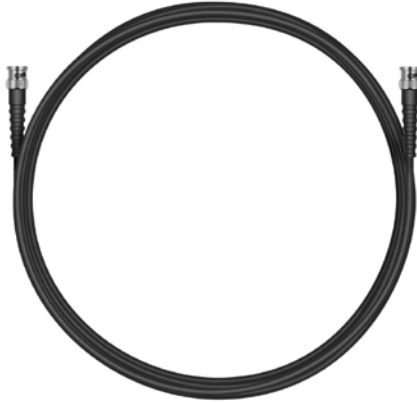

PRODUCT VARIANTS

GZL RG 58 - 0.25M	RF cable 0.25 m	Art. No. 700158
GZL RG 58 - 0.5M	RF cable 0.5 m	Art. No. 700159
GZL RG 58 - 1M	RF cable 1 m	Art. No. 700160
GZL RG 58 - 5M	RF cable 5 m	Art. No. 700161
GZL RG 58 - 10M	RF cable 10 m	Art. No. 700162

GZL RG 8X - 5M	RF cable 5 m	Art. No. 700163
GZL RG 8X - 10M	RF cable 10 m	Art. No. 700164
GZL RG 8X - 20M	RF cable 20 m	Art. No. 700165

SPECIFICATIONS

GZL RG 58

Diameter	6.15 mm
Impedance	50 Ω
Max. operating frequency	1000 MHz
Conductor DCR	3.54 Ω /100 m
Capacitance	101 pF/m
Max. attenuation (@ 20 °C)	400 MHz: 34.8 dB/100 m 1000 MHz: 56.4 dB/100 m
Operating temperature range	-40 °C to 85 °C (-40 °F to 185 °F)

GZL RG 8x

Diameter	6.8 mm
Impedance	50 Ω
Max. operating frequency	4000 MHz
Conductor DCR	\leq 3.2 Ω /100 m
Capacitance	82 pF/m
Max. attenuation (@ 20 °C)	400 MHz: 16.8 dB/100 m 1000 MHz: 25.2 dB/100 m
Operating temperature range	-40 °C to 70 °C (-40 °F to 158 °F)