


## SKM 2020 D

The SKM 2020 D is a component of the Tourguide System 2020. Please observe the safety information and frequency usage information contained in the overall system manual which is enclosed with the EZL 2020-20 L charging case. You can obtain this instruction manual (ID No. 516509) separately from your Sennheiser dealer or download it from our website at [www.sennheiser.com](http://www.sennheiser.com).

# Tourguide System 2020 SKM 2020 D

Kurzanleitung  
Quick guide  
Notice d'emploi  
Guida rapida  
Instrucciones resumidas  
Beknopte handleiding

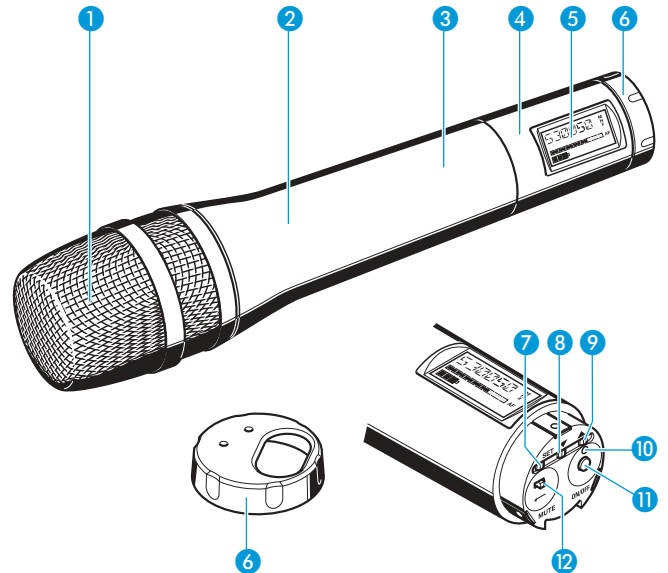

- 1 Sound inlet basket
- 2 Body of radiomicrophone
- 3 Battery compartment (not visible from outside)
- 4 Display section
- 5 LC display
- 6 Turnable protective cap for operating controls (shown removed); the following operating controls become accessible in turn by turning the protective cap:
  - 7 SET button
  - 8 ▼ button (DOWN)
  - 9 ▲ button (UP)
  - 10 Operation / battery status indicator, red LED (ON/LOW BATT)
  - 11 ON/OFF button (= ESC (cancel) key in the operating menu)
  - 12 MUTE switch

### Specifications

Modulation	2 FSK (46 K0F 1D)
Frequency range	863 – 865 MHz
Frequency range (US)	926 – 928 MHz
Channels	6
RF output power	10 mW
RF output power (US)	max. 50 mV/m (distance: 3 m)
AF frequency response	100 – 7,000 Hz
Operating time	typ. 8 hrs
Power supply	BA 2015 accupack, 2.4 V or 2 AA size batteries, 1.5 V
Temperature range	0 °C to + 50 °C
Dimensions	50 mm x 225 mm
Weight (with BA 2015 accupack)	422 g

CE 0682

You will find further information at our website [www.sennheiser.com](http://www.sennheiser.com)